
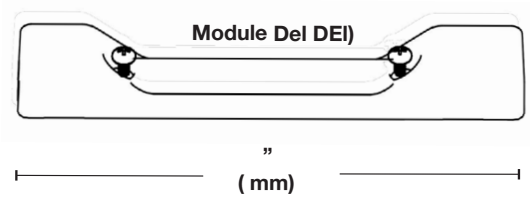
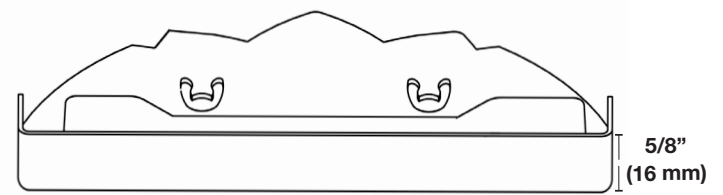



PROJET: _____

Spécifications

Matériel	Acier inoxydable
Écran anti-éblouissement	L'écran descend plus bas que la source lumineuse afin de réduire l'éblouissement.
Finition	<ul style="list-style-type: none"> • Gris (GRY) • Noir (BK) • L'aluminium est peint avec le processus de peinture en poudre (cuite)
Source lumineuse	Module DEL blanc (Diode électroluminescente)
Température (Couleur)	2700 ou 3000 Kelvin
Flux lumineux	100 lumens
Durée de vie	50,000 hours
Gradable	Oui
Tension	12 volts AC/DC
Consommation	1 watt
Certification	Le luminaire a été testé par Intertek et est conforme aux normes UL 1838 et CSA C22.2 No. 250.7.
Garantie	5 ans limitée

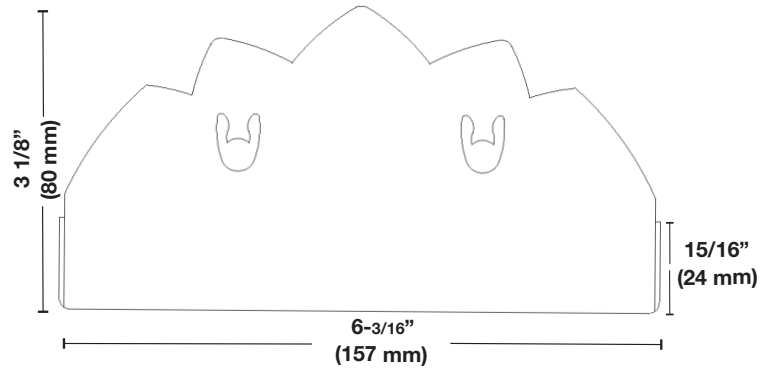

Information de commande



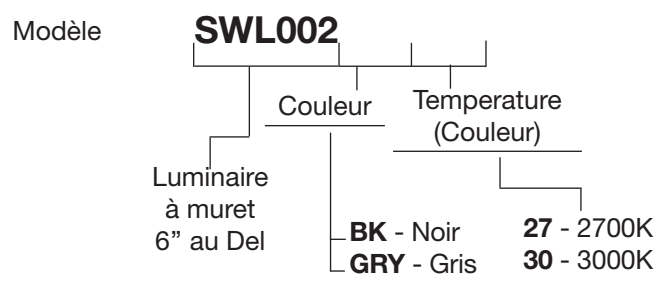


Avis : Toutes les cotes peuvent être modifiées sans préavis.


PROJECT:

Specifications

Material	Stainless steel
Glare Shield	The screen goes lower than the light source to minimize glare.
Shield finish	<ul style="list-style-type: none"> • Black (BK) • Grey (GRY) • Aluminum is painted with powdercoating process
Light Source	White LEDs Module (Light Emitting Diode)
Color Temperature	2700 or 3000 Kelvin
Luminous Flux	100 lumens
Rated Lifetime	50,000 hours
Dimmable	Yes
Voltage	12-Volts AC/DC
Power Usage	1 Watt
Certification	The luminaire has been tested by Intertek and complies with UL 1838 and CSA C22.2 No. 250.7.
Warranty	5-years Limited

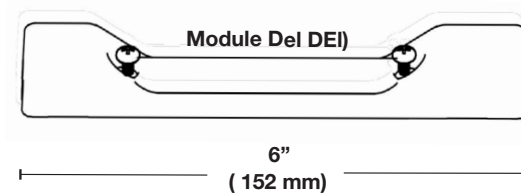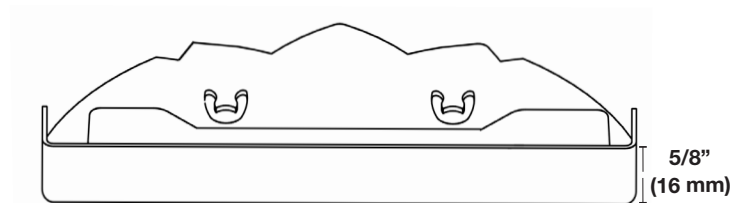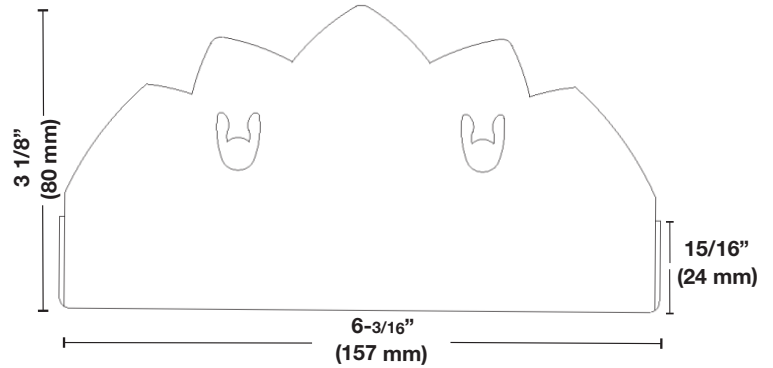

Order information

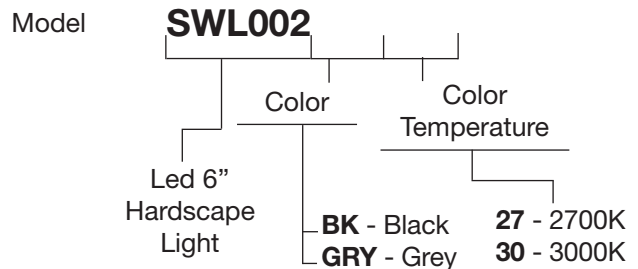

Notice: All ratings subject to change without notice.



DERCO HORTICULTURE
475 Rue Laferté, Drummondville, QC J2C 3K1 •Derco.ca

REVISION
23.02.2023