


PROJET:

## Spécifications

|  |  |
|--|--|
| <b>Ampoule</b>                           | T3   |
| <b>Base</b>                              | GU4  |
| <b>Tension</b>                           | 12 Volts AC/DC   |
| <b>Type</b>                              | DEL (Diode électroluminescente)  |
| <b>Consommation</b>                      | 4 watts  |
| <b>Lumière incandescente équivalence</b> | 20 watts   |
| <b>Angle d'éclairage</b>                 | 360°   |
| <b>Température (Couleur)</b>             | 2700 ou 3000 Kelvin selon modèle   |
| <b>Flux lumineux</b>                     | 280 lumens   |
| <b>Rendu de couleur</b>                  | IRC 80+  |
| <b>Durée de vie moyenne</b>              | 25 000 heures  |
| <b>MOL</b>                               | 1 7/8" (48 mm)   |
| <b>Usage</b>                             | Compatible avec des luminaires fermés  |
| <b>Gradable</b>                          | Oui  |
| <b>Certification</b>                     | L'ampoule est testé par Intertek et conforme aux normes UL 1838 et CSA C22.2 No. 250.7 |
| <b>Garantie</b>                          | 5 ans limitée  |

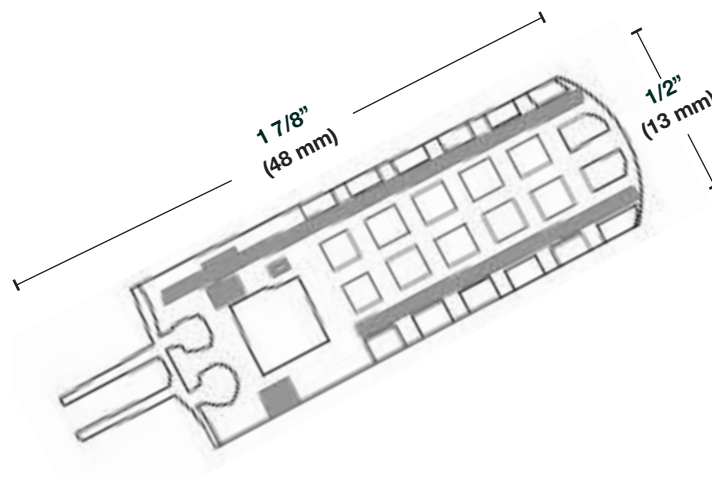


### Information de commande

|        |                       |
|--------|-----------------------|
| Modèle | <b>SWL30</b>          |
|        |                       |
|        | Température (couleur) |
|        |                       |
|        | T3                    |
|        |                       |
|        | Ampoule 12 V          |
|        |                       |
|        | 4 watts               |
|        |                       |
|        | 8 - 2700K             |
|        |                       |
|        | 9 - 3000K             |

PROJET:

## Specifications

|                                      |  |
|--------------------------------------|--|
| <b>Lamp</b>                          | T3   |
| <b>Base</b>                          | GU4  |
| <b>Voltage</b>                       | AC/DC 12 Volts   |
| <b>Type</b>                          | LED (Light emitting diode)   |
| <b>Consumption</b>                   | 4 watts  |
| <b>Light incadescent Equivalence</b> | 20 Watts   |
| <b>Beamsread</b>                     | 360°   |
| <b>Color Temperature</b>             | 2700 or 3000 Kelvin depending on model   |
| <b>Luminous Flux</b>                 | 280 lumens   |
| <b>Color Rendering</b>               | CRI 80+  |
| <b>Average Life</b>                  | 25 000 hours   |
| <b>MOL</b>                           | 1 7/8" (48 mm)   |
| <b>Usage</b>                         | Compatible with closed luminaires  |
| <b>Dimmable</b>                      | Yes  |
| <b>Certification</b>                 | The lamp has been tested by Intertek and complies with UL 1838 and CSA C22.2 No. 250.7 |
| <b>Warranty</b>                      | Limited 5 years  |

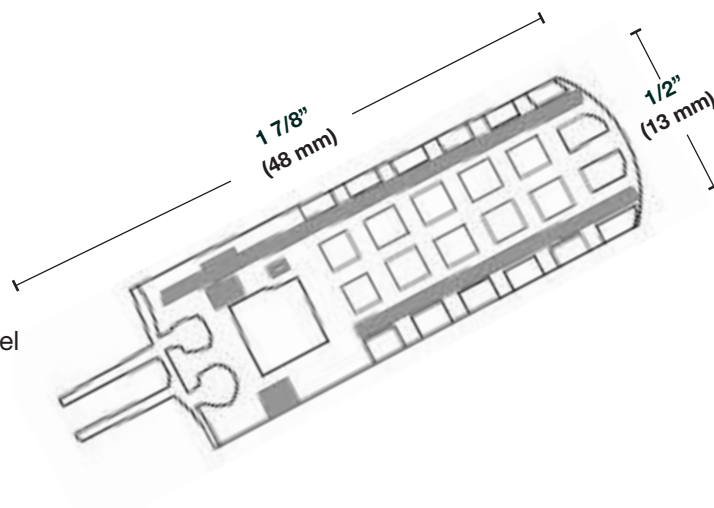

### Order information

